



SPECIFICATION SHEET :NLT2-200-230

Description : NLT2-200-230 electronic ballast developed for use with UV lamp applications. This ballast will operate the following lamps.



APPROVED FOR UV LAMPS: 2Lamps T12;200W
Warranty: 5 Years.

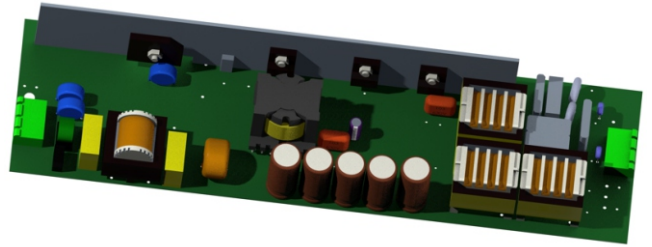


ELECTRICAL DATA (220 ~ 240V APPLICATION)

INPUT VOLTS: 220 ~ 240VAC 50/60Hz	
LAMP WATTS/TYPE	T12 LAMP 200W
LAMPS OPERATED	2
INPUT WATTS	420W
LINE CURRENT:	1. 8A
POWER FACTOR	0.98
BALLAST FACTOR	0.91
EFFICACY FACTOR	93%
THD	8
CURRENT CREST FACTOR	<1.7
EMI/RFI COMPLIANCE	EN55015
SOUND RATING	" A "
BALLAST TYPE	INSTANT START
VOLTAGE TRANSIENTS	ANSI 62.41
INPUT/PROTECTION	FUSE
OUTPUT/PROTECTION	EOL
MIN. OPERATING TEMP	-20°C (-4° F)
MAX. CASE TEMP	100°C(212°F)
APPROVALS/CLASS	Meet CE

Wiring Diagram:(200W)

2-LAMP (200W)

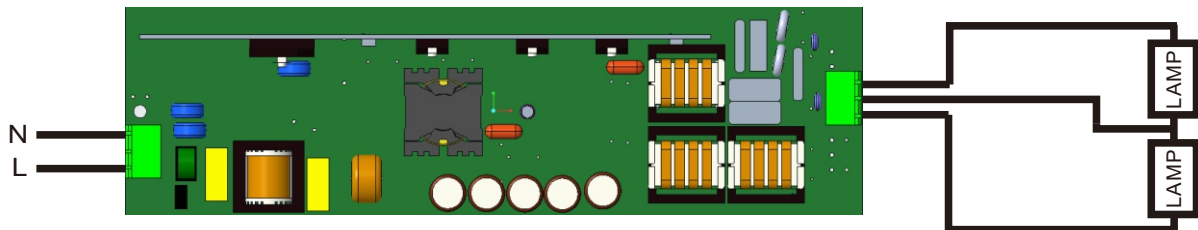

SPECIFICATION SHEET :NLT2-200-230

Physical Parameters

Mounting Length - 250mm

Width - 70.5 mm

Height - 36 mm

