


SPECIFICATION SHEET :NLT2-200-230-DALI

Description : NLT2-200-230-DALI electronic ballast developed for use with UV lamp applications. This ballast will operate the following lamps.



APPROVED FOR UV LAMPS: 2Lamps T12;200W
Warranty: 5 Years.

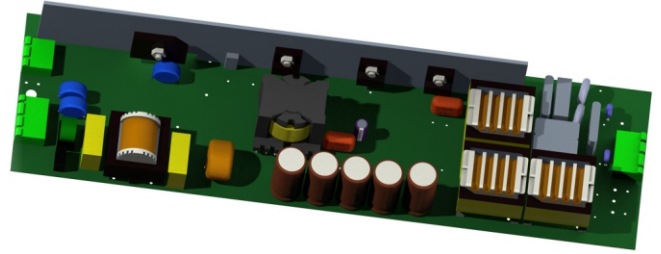


ELECTRICAL DATA (220 ~ 240V APPLICATION)

INPUT VOLTS: 220 ~ 240VAC 50/60Hz	
LAMP WATTS/TYPE	T12 LAMP 200W
LAMPS OPERATED	2
INPUT WATTS	424W
LINE CURRENT:	1.85A
POWER FACTOR	0.98
BALLAST FACTOR	0.91
EFFICACY FACTOR	93%
THD	8
CURRENT CREST FACTOR	<1.7
EMI/RFI COMPLIANCE	EN55015
SOUND RATING	"A"
BALLAST TYPE	INSTANT START
VOLTAGE TRANSIENTS	ANSI 62.41
INPUT/PROTECTION	FUSE
OUTPUT/PROTECTION	EOL
MIN. OPERATING TEMP	-20°C (-4° F)
MAX. CASE TEMP	100°C(212°F)
APPROVALS/CLASS	Meet CE

Wiring Diagram:(200W DALI)

2-LAMP (200W DALI)

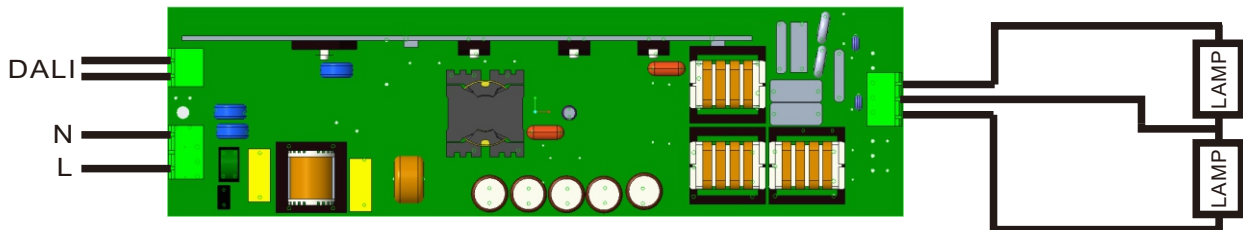

SPECIFICATION SHEET :NLT2-200-230 DALI

Physical Parameters

Mounting Length - 250mm

Width - 70.5 mm

Height - 36 mm

