




RoHS COMPLIANT

Description :NLT400U-PH-48V,High frequency electronic,rapid start ballast.
This ballast will operate the following lamps.




Lamp Type: GPH247T5L(10"),GPH303T5(12"),GPH436T5(17")
 PLL18W, PLL36W

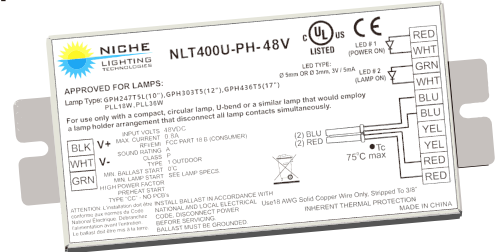

ELECTRICAL DATA

INPUT VOLT	48Vdc(36-75Vdc)				
LAMP WATTS/TYPE	GPH247T5L(10")	GPH303T5(12")	GPH436T5(17")	PLL18W	PLL36W
LAMP CURRENT	400mA	400mA	400mA	400mA	400mA
LAMPS OPERATED	1				
INPUT WATTS:(W)	11.9	18.5	21.8	22.3	39.5
LINE CURRENT:(A)	0.247	0.383	0.455	0.466	0.8
EMI/RFI COMPLIANCE	FCC PART 18B ,(CONSUMER)				
SOUND RATING	" A "				
BALLAST TYPE	PREHEAT START				
VOLTAGE TRANSIENTS	ANSI 62.41				
INPUT/PROTECTION	FUSE				
OUTPUT/PROTECTION	NONE				
MIN. OPERATING TEMP	-10 °C (14 °F)				
MAX. CASE TEMP	75 °C (167 °F)				
APPROVALS/CLASS	UL/CUL , CLASS " P ", Type 1 OUTDOOR,Type "CC",ROHS.				

MECHANICAL DATA

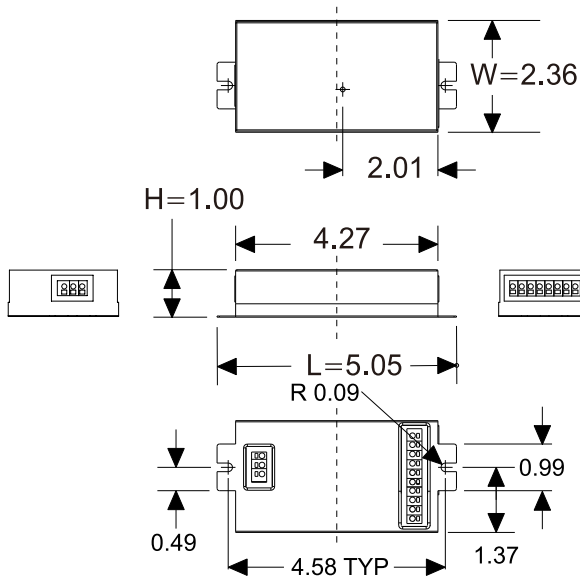

WIRING DIAGRAMS

