




SPECIFICATION SHEET

NLB1S96PSUNV

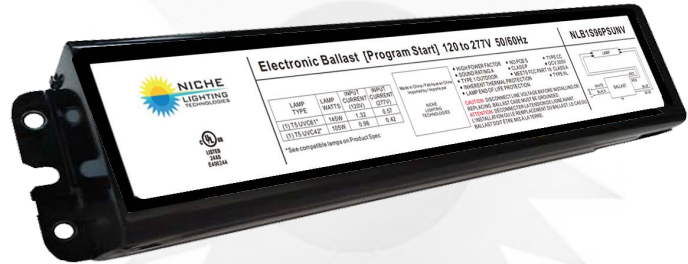

- Line Voltage: 120-277V 50/60Hz
- Lamp End of Life Protection
- Program Start
- Active Power Factor Correction
- Type CC

Lamp Type		Min. Start Temp. (°F/°C)	Vin (V)	Iin (A)	Pin (W)	ATHD ≤%	PF ≥	CF ≤
Type	No.							
*T5 UVC61"	1	-20/-29	120	1.32	160	10	0.98	1.70
T5 UVC42"	1	-20/-29	120	0.96	115	10	0.98	1.70
*T5 UVC61"	1	-20/-29	277	0.57	156	10	0.98	1.70
T5 UVC42"	1	-20/-29	277	0.42	115	10	0.97	1.70

Note: the above data is tested at 60Hz.

Application and Performance Specification Information Subject to Change without Notification.

Performance

Meets ANSI Standard C82.11-2002

Meets ANSI Standard C62.41-2002

Meets FCC 18 Non-CONSUMER Limits

Safety

No PCBs, Type HL

UL listed (Class P, Type 1 Outdoor)

OCV : 300V

Application

Maximum Ambient Temperature: 131°F, 55°C Remote

Mounting: 18 ft. max. Lead length, 18AWG Sound

Rated: A

Maximum case temperature Tc: 167°F, 75°C

Physical Parameters

Length 9.5"/242mm

Width 1.7"/44mm

Height 1.2"/31mm

Mounting 9"/228mm

Weight 1.3 lbs/589g

Lead Length

White, Black 18"(±1")/457mm

Red/Blue 47"(±1")/1190mm 32"(±1")/813mm



SPECIFICATION SHEET

NLB1S96PSUNV

